

BISMUTH (Bi_2Te_3) TELLURIDE Sputtering Target

NS6130-10-1496


Quick Facts

| | | |
|-------------------|---|--|
| Product | : | Sputtering Target Bi_2Te_3 |
| Stock No | : | NS6130-10-1496 |
| CAS | : | 1304-82-1 |
| Molecular Formula | : | Bi_2Te_3 |
| Form | : | Solid |

Technical Specification

| Diameter | Thickness | Molecular Weight |
|-------------------|------------------|------------------|
| 50.8 mm \pm 1mm | 3 mm \pm 0.5mm | 800.76g/mol |

Bi_2Te_3 sputtering targets have a wide range of applications in various industries due to their thermoelectric properties, microelectronic applications, aerospace applications, thin film coatings, and research and development applications. Bi_2Te_3 sputtering targets are also used in research and development applications such as materials science and semiconductor physics. Bi_2Te_3 onto substrates for various applications such as optical coatings, surface passivation, and corrosion protection. Bi_2Te_3 sputtering targets are used in the production of coatings for aerospace components such as turbine blades and heat exchangers.

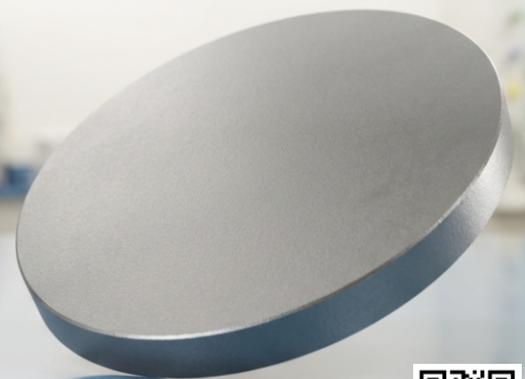

* This image is for graphic purposes only and does not represent the actual product.

